CV-602

The **Perfect Solution** for Small 'Entry Level' **Access Control Applications**

Economical 2 Door Access Control System

- ▶ 2,000 users
- ▶ Complete kits include controller, (1) or (2) readers and (5) cards
- ▶ Individual or batch card/tag enrollment
- ▶ Programming via front panel buttons or USB connected computer
- ▶ 26, 34 and 37 bit Wiegand protocol, with site code
- ▶ Latching or timed door open, anti-pass back
- ▶ Software & USB cable included:
  - Day/Week/Holiday scheduling
  - Easily defined access groups
  - 3,800 event audit trail

M-PROX2

M-PROX2	
F1:	Relay1 setup time
F2:	Relay2 setup time
F5:	Block enroll cards
F6:	Block delete cards
F7:	Erase all cards
F8:	Program password
F9:	Delete password
F10:	Operating modes
F11:	Reset antipassback
F12:	Set internal clock/date
F13:	Enable group assign
F14:	Reset antipassback for a single user

Daycare

Restricted Areas

Small Commercial and Warehouses

Professional Offices

Camden DOOR CONTROLS

DISCOVER THE BEST IN DOOR ACTIVATING AND LOCKING PRODUCTS!

TOLL FREE: 1.877.226.3369 • Tel: 905.366.3377 • Fax: 905.366.3378
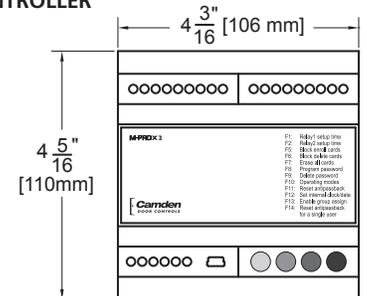info@camdencontrols.com • www.camdencontrols.com

CV-602 M-PROX2™ two door proximity access control systems are an easily installed and affordable solution for professional offices, retail, daycare or other small system applications. They are also an ideal upgrade to keypads; providing the convenience of proximity access, as well as access scheduling and an event audit trail.
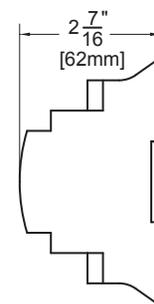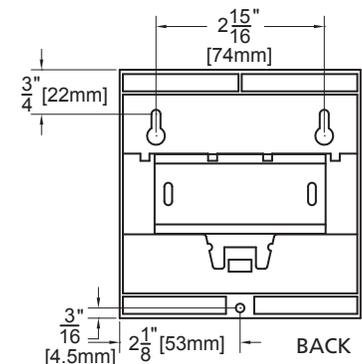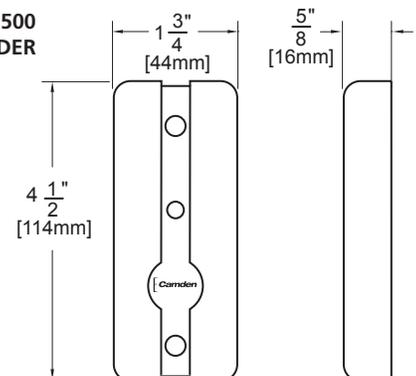
CV-602 CONTROLLER

FRONT

SIDE

BACK

CV-7500 READER

FRONT   SIDE

SPECIFICATIONS

Users:	2,000 Cards or FOBs
Voltage:	12/24 V AC/DC
Input:	(2) 26, 34 and 37 bit Wiegand (2) Request to Exit
Output:	(2) Form 'C' relays
Contact Rating:	5A @ 30V DC
Operation:	Hard or timed anti passback password protection
Programming:	Via 4 button control panel or USB connected computer
Scheduling:	Daily, weekly and holidays
Audit Transactions:	3,800 events
Readers:	CV-7500 AWID format mullion mount proximity up to 4" - 5" read range
Dimensions:	**Controller:** 4 5/16"H x 4 3/16"W x 2 7/16"D (110mm x 106mm x 62mm) **CV-7500 Reader:** 4 1/2"H x 1 3/4"W x 5/8"D (114mm x 44mm x 16mm)

ORDERING INFORMATION

MODEL	DESCRIPTION
CV-602	M-PROX2, two door controller
CV-602K1	M-PROX2 controller c/w mullion reader and (5) AWID prox. cards
CV-602K2	M-PROX2 controller c/w (2) mullion readers and (5) AWID prox. cards
COMPATIBLE READERS AND CARDS	
CV-7500	AWID format mullion mount proximity card reader, up to 4" - 5" read range
CV-7500P	Single gang adaptor plate for CV-7500
CV-CSA	AWID prox cards, clam shell style, package of 10
CV-CSA-B	AWID prox cards, clam shell style, box of 100
CV-KTA	AWID key tag, package of 25
COMPATIBLE KEYPAD	
CM-120i	Digital keypad, indoor
CM-120wV2	Weather and vandal resistant illuminated keypad, indoor/outdoor