CX-95S-DH Magnetic Door Holder





Camden CX-95S-DH Magnetic Door
Holder is designed for virtually any
remote door release application. The
UL-listed Magnetic Door Holder controls
the release and closing of commercial
and public area doors, ideal for use in
apartment buildings, schools, hotels,
hospitals, and offices.

Fail-safe operation, tri-volt coils, and an adjustable armature plate allow for easy and flexible installation. Camden Magnetic Door Holders may be surface or flush mounted (CX-95S-DH), or floor mounted (CX-95S-DH-FL), with all mounting hardware included in the kit. Optional extension bars are also available.



Features

- Multiple voltages: 12/24V, AC/DC, 120 VAC
- Armature plate adjusts to door alignment
- CX-95S-DH: Surface or flush mount model
- CX-95S-DH-FL: Floor mount model
- Up to 35 lbs (16 kg) holding force
- Used for door release in public, industrial and commercial applications
- 3" & 7" extension bars available
- 2 year warranty

SPECIFICATIONS

VOLTAGE: 12/24V AC/DC, 120V AC

CURRENT DRAW: 55mA @ 12V AC

57mA @ 12V DC, 32mA @ 24V AC 34mA @ 24V DC, 30mA @ 120V AC

STATIC HOLD FORCE: **12V AC/DC:** Up to 30 lbs.

24V AC/DC: Up to 35 lbs.

120V AC: Up to 18 lbs.

MOUNT OPTIONS: Surface or Flush Mount

DIMENSIONS: Surface Mount Magnet:

2-3/4" W x 4-5/8" L x 2-1/2" D (70mm x 116mm x 62 mm)

Flush Mount Magnet:

2-3/4" W x 4-5/8" L x 1-3/4" D (70mm x 116mm x 44mm)

Armature Plate:

2-9/16" W x 2-9/16" L x 2-7/8" D


65mm x 65mm x 74mm)

L Bracket:

4-1/2" W x 3-9/16" L x 1-3/4" D (114mm x 90mm x 44mm)

ORDERING INFORMATION MODEL CX-95S-DH Magnetic Door Holder Surface/Flush Mount CX-95S-DH-FL Magnetic Door Holder Floor Mount EXTENSION BARS CX-95S-3E 3" Magnetic Door Holder Extension Bar CX-95S-7E 7" Magnetic Door Holder Extension Bar



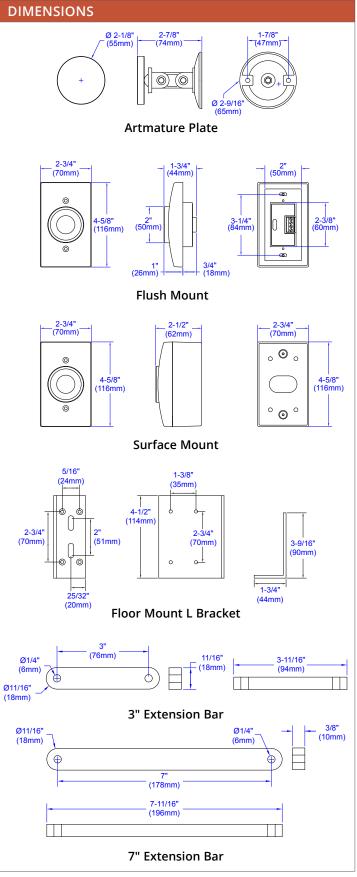



Opening New Doors to Innovation, Quality, and Support!

